

IP68 快速防水接线器/Quick waterproof connector


KH-LP-20-5P



产品参数/Technical data

型号 Model	KH-LP-20-5P	
材料 Material	防火阻燃 Fire and flame retardant UL94V-2	
额定输出 Rated output	IEC/:24A 450VAC	
防护等级 IP code	IP68	
接线内芯 Terminal	2P/3P/4P/5P	
工作温度 Working	T85	
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 2.5mm ²	
密封胶塞/seal plug		
胶塞孔径/plug aperture	8mm	12mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	2*M20(4-8mm)	2*M20(6-12mm)
防水测试 Testing	IP68	
参考剥线长度 Refer to stripping length	6mm (0.5~1.0mm ²) 6mm (1.5~2.5mm ²)	
产品尺寸 Product Size(参考实际尺寸图)	39*124mm (Refer to actual drawing)	
认证 Certification	CE,ROHS	
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground	

产品图纸/Product drawings

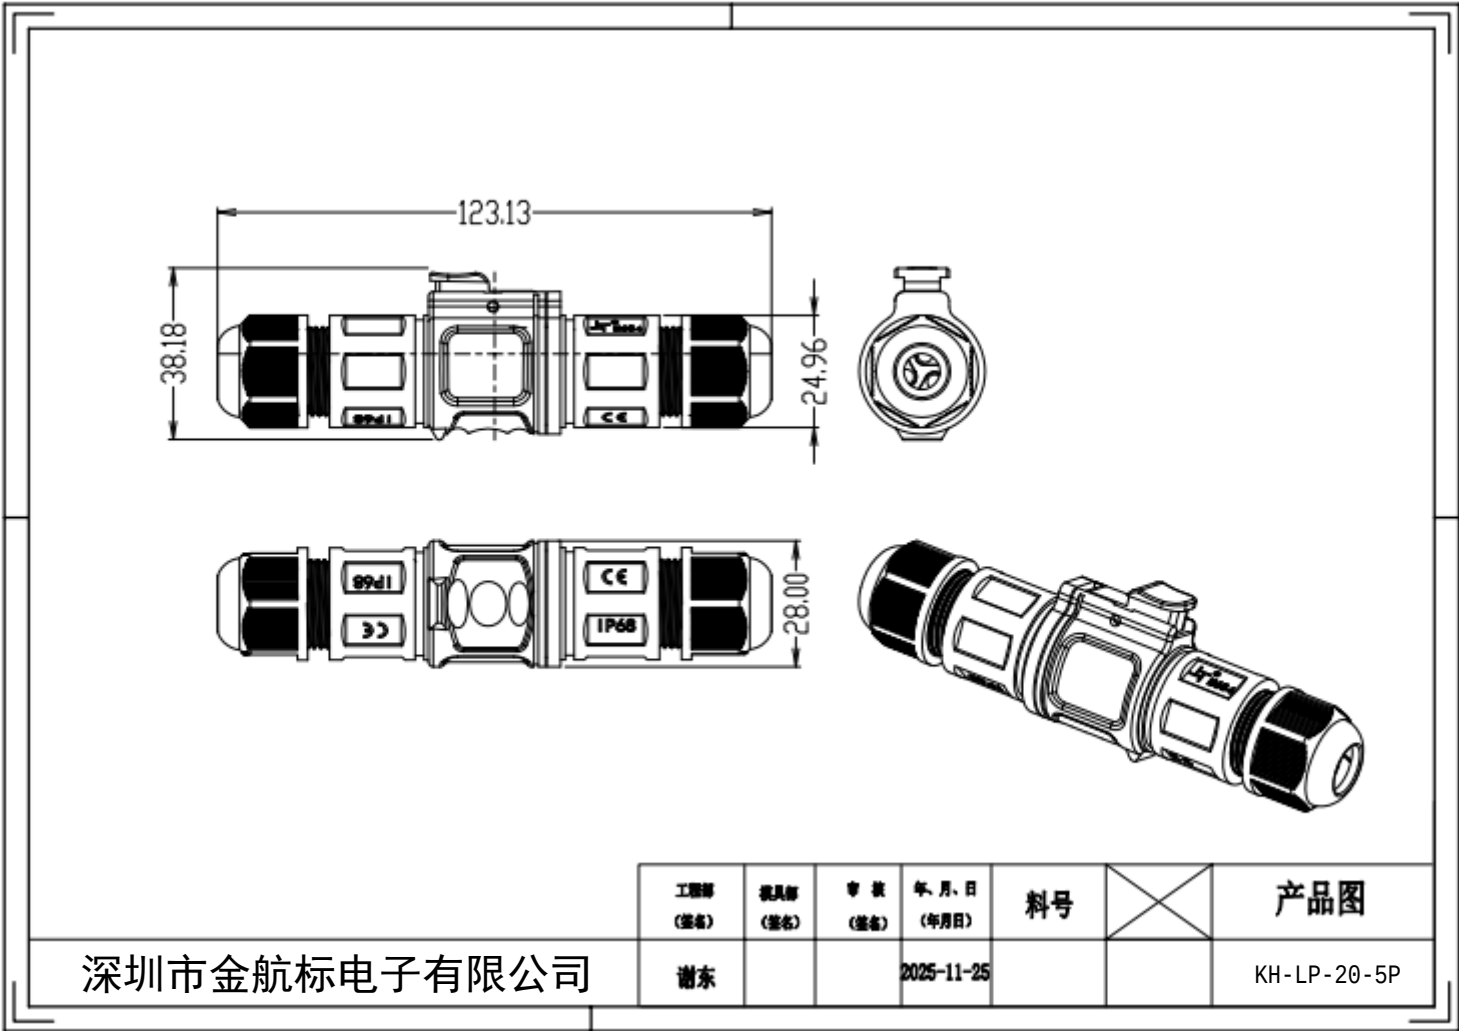

参考剥线长度
Refer to stripping length

