
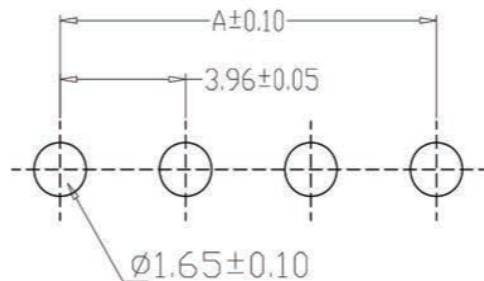


SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

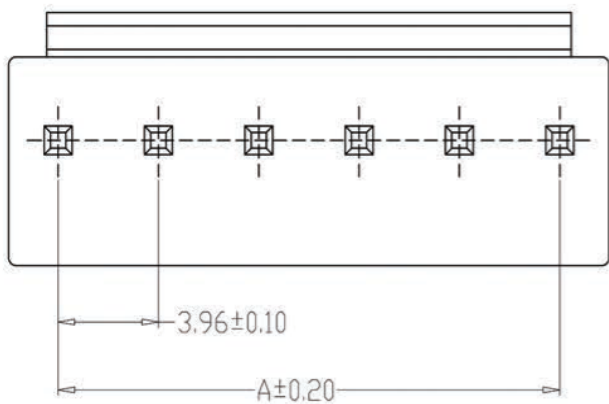

PCB LAYOUT

| 编号 | 尺寸 (mm) | |
|-----------|---------|-------|
| | A | B |
| A3961-02A | 3.96 | 7.92 |
| A3961-03A | 7.92 | 11.88 |
| A3961-04A | 11.88 | 15.84 |
| A3961-05A | 15.84 | 19.80 |
| A3961-06A | 19.80 | 23.76 |
| A3961-07A | 23.76 | 27.72 |
| A3961-08A | 27.72 | 31.68 |
| A3961-09A | 31.68 | 35.64 |
| A3961-10A | 35.64 | 39.60 |
| A3961-11A | 39.60 | 43.56 |
| A3961-12A | 43.56 | 47.52 |

| 制图 DRAWN | 变更内容 DESCRIPTION | 日期 DATE | GENEAL TOLERANCE | | 制图 DRAWING | 料号 PART NO. | 版本 REV. |
|-------------|---------------------|------------|------------------|------------|-------------------|------------------------|---------------------|
| | | | X.±0.25 | X.'±2' | 钱岳生 2013、07、01 | A3961-NA | A |
| | | | .X±0.20 | .X'±1' | 张名 2013、07、03 | VH直针 WAFER DIP TYPE | 1/1 |
| | | | .XX±0.15 | .XX'±0.5' | 张名 2013、07、05 | 客户料号 CUTM. NO. | |
| | | | .XXX±0.10 | .XXX'±0.5' | 核准 APPROVAL | 深圳市金航标电子有限公司 | www.kinghelm.com.cn |
| | | | | | 单位 UNITS | KH-VH-7P-Z | 0755-83044319 |
| | | | | | MM | 比例 SCALE | 1:1 |