
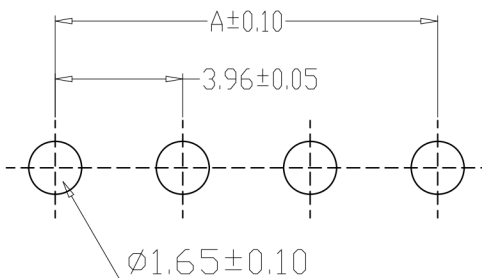


SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

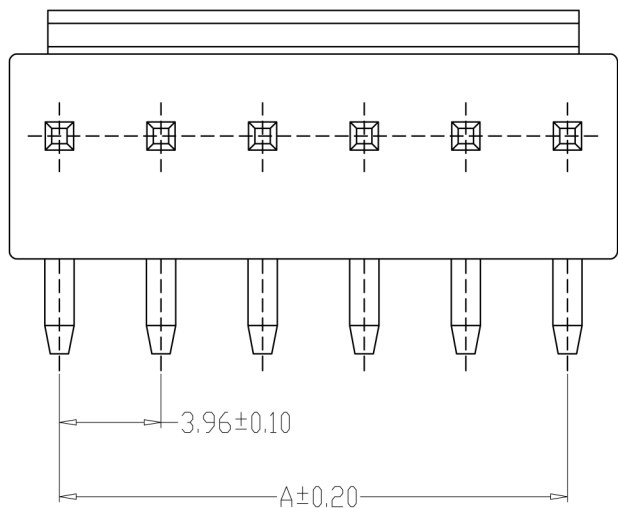

PCB LAYOUT

| 编 号 | 尺寸 (mm) | |
|------------|---------|-------|
| | A | B |
| A3961-02AW | 3.96 | 7.92 |
| A3961-03AW | 7.92 | 11.88 |
| A3961-04AW | 11.88 | 15.84 |
| A3961-05AW | 15.84 | 19.80 |
| A3961-06AW | 19.80 | 23.76 |
| A3961-07AW | 23.76 | 27.72 |
| A3961-08AW | 27.72 | 31.68 |
| A3961-09AW | 31.68 | 35.64 |
| A3961-10AW | 35.64 | 39.60 |
| A3961-11AW | 39.60 | 43.56 |
| A3961-12AW | 43.56 | 47.52 |

| 制图 DRAWN | 变更内容 DESCRIPTION | 日期 DATE | GENERAL TOLERANCE | | 制图 DRAWING | 钱岳生 2013、07、01 | 料号 PART NO. | A3961-NAW | 版本 REV. | A |
|-------------|---------------------|------------|-------------------|------------|----------------|-------------------|---------------------|------------------------|-------------|-----|
| | | | X.±0.25 | X.'±2' | 审核 CHECK | 张名 2013、07、03 | 品名 TITLE | VH平弯 WAFER DIP TYPE | 页次 SHEET | 1/1 |
| | | | .X±0.20 | .X'±1' | 核准 APPROVAL | 张名 2013、07、05 | 客户料号 CUTM. NO. | KH-VH-3P-W | | |
| | | | .XX±0.15 | .XX'±0.5' | 单位 UNITS | MM | 比例 SCALE | 1:1 | | |
| | | | .XXX±0.10 | .XXX'±0.5' | | | www.kinghelm.com.cn | 0755-83044319 | | |

深圳市金航标电子有限公司