
Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

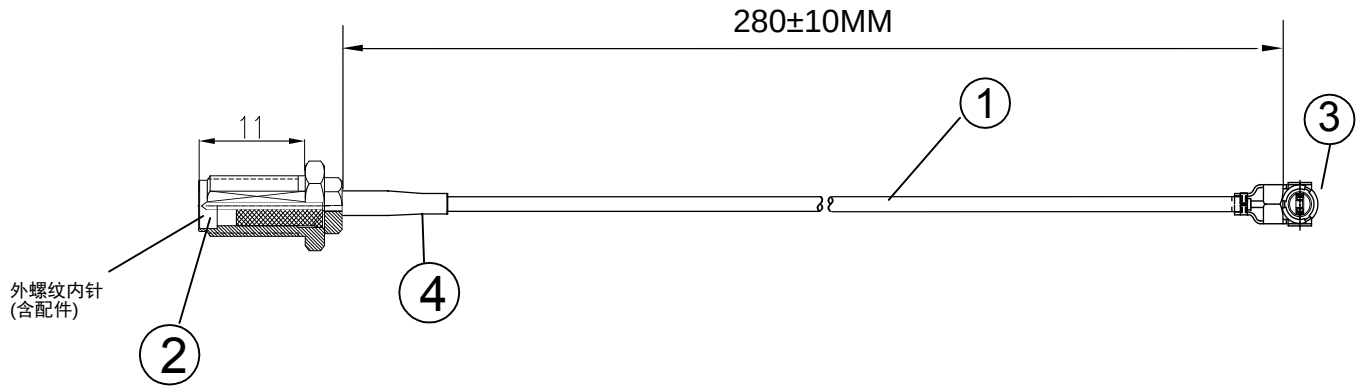

NOTES:

1. ELECTRICAL:
1.1. VOLTAGE RATING:DCV 300V 10MS
1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPITION	QTY.
④	套管	OD:2.5* 15 mm	2
③	接头	国产一代IPEX端子，镀金	1
②	接头	SMA 母头公针(反极性)，牙长11mm,镀金	1
①	同轴线	RF1.13黑色线 ， OD:1.13MM	AS

深圳市金航标电子有限公司
SHENZHEN KINGHELM ELECTRONIC CO.,LTD.

ALL DIMENSION ARE IN MM	DRAWN James	DATE	
	CHKD. Frank		KH-RPSMAK-IPEX-RG1.13-B280MM
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	APPD. Scott		
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		SIZE B / DWG Number. / REV A
			SCALE: Free / TYPE / SHEET 1 OF 1

CUSTOMER P/N: