






RoHS 2.0

Kinghelm®



3D VIEW

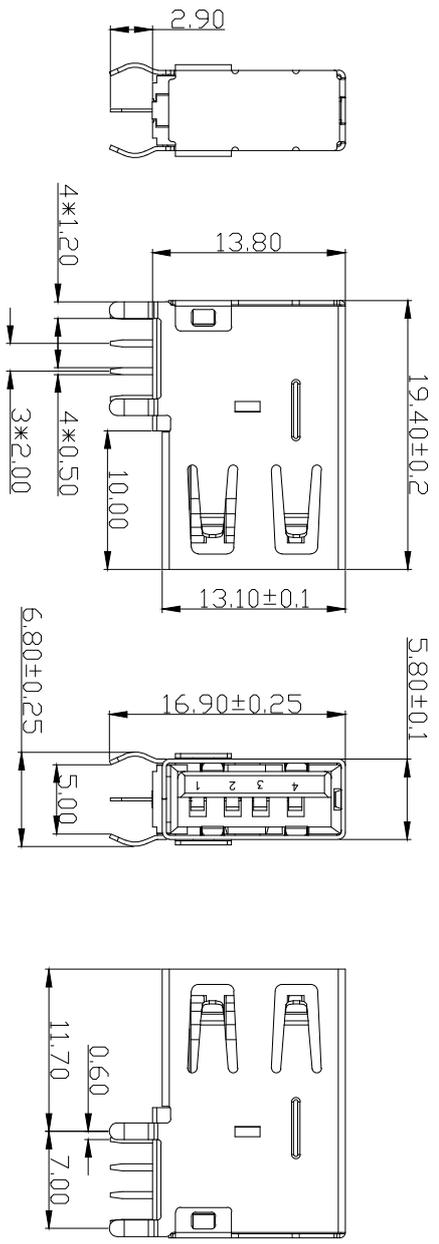

RECOMMEND PCB LAYOUT(±0.05)

- NOTES:
- MATERIAL:
 - HOUSING: PBT ,COLOR IS WHITE;
 - CONTACT: BRASS,T=0.25±0.02mm;
 - SHELL: SPCC,T=0.3±0.02mm;
 - FINISH:
 - TERMINAL: CONTACT AREA: GOLD PLATED G/F/U"; SOLDER AREA: PLATED OVER TIN;

- REINNEBED PCB THICKNESS: 1.60mm;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 500 VAC RMS
- INSULATION RESISTANCE: 50(60)HZ,1MIN.; 100MEG OHMS MIN @500V DC;
- MECHANICAL:
 - MATING FORCE: 35N MAX.;
 - UNMATING FORCE: 5~35N;
 - OPERATING LIFE: 1500 CYCLES MIN.;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C;
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A1.	/.	重新核对图面	21.01.07	LHUI

深圳市金航标电子有限公司		WWW.BDS666.COM	
KH-AF90WJ-19.4-C1.2X6.8		0755-83044319	
UNLESS OTHERWISE SPECIFIED:	NAME:	P/N:	09.04.01.011
GENERAL TOLERANCE:	A母侧插长体平口	DWG NO.:	
X.xxx ±0.10	(K脚1.2*6.8) 自胶		
X.xx ±0.20			
X.x ±0.30			
ANGULAR:	THIRD ANGLE PROJECTION	UNIT:	SCALE:
X.xx' ±1'		mm	1:1
X.x' ±3'			A4
X.' ±5'		CHECKED:	SHEET: 1/1
			REV.:
			A1
		DRAWN:	APPROVED

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15