


短脚卷边

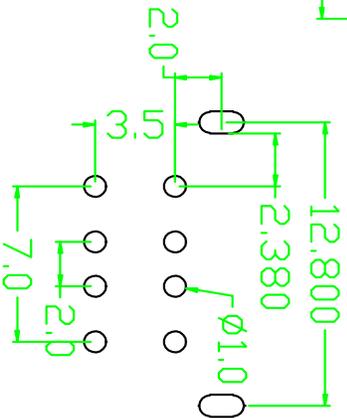

1. Material :
 Contact: Phosphore Bronze
 Insulator: PBT+30% G.F. UL 94V-0
 Shell: SPCC
2. Mechanical :
 Mating: 35N max.
 Withdraw Force: 10N min.
 Durability: 1500 cycles min.
3. Electrical :
 Current-max (amps) 1.5A
 Voltage-max (volts) 30V
 Withstanding Voltage 750V AC
 Contact Resistance (ohms) 30 milliohms max insulation
 Resistance (ohms) 1000 Megohms min.
4. Plating:
 Contacts: Gold And Tin Over Nickel Plated
 Shell: Nickel over all plating.
5. Environmental :
 Temperature Range: -55 to 85

产品图 MINIATURE PCB		公差一览表 TOLERANCE DIMENSION OVERVIEW		深圳市金航标电子有限公司 KH-2AF902L-13.5JB		www.BDS666.COM	
单位 UNIT	MM	INCH		产品名称	USB A/F 双层90度短体13.5卷边	审核 CHECK	核准 APPRO
X	±0.20	X	±	角法 VIEW	比例 1:1	设计 DESIGN	
.XX	±0.10	.XX	±	图号		图号	
.XXX	±0.05	.XXX	±	版本	A1	图号	
2013.08.29				图号		CXC1	版本 1/1