

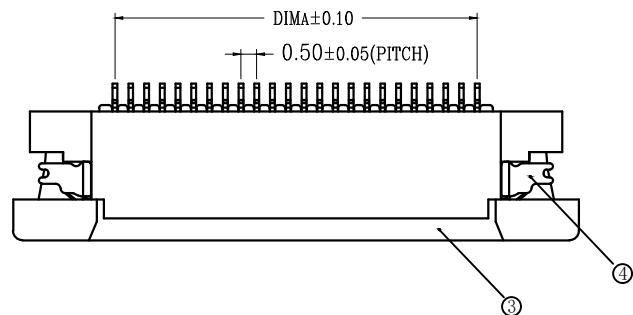


SECTION A-A

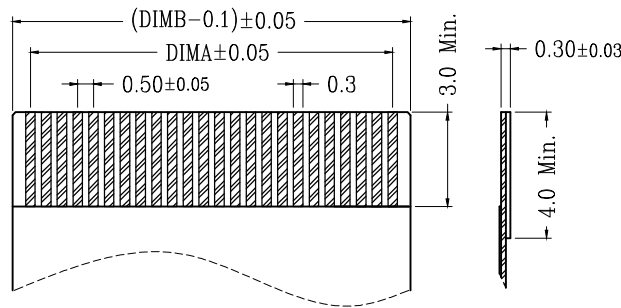

适用扁平线 (Applicable Flat Cable)

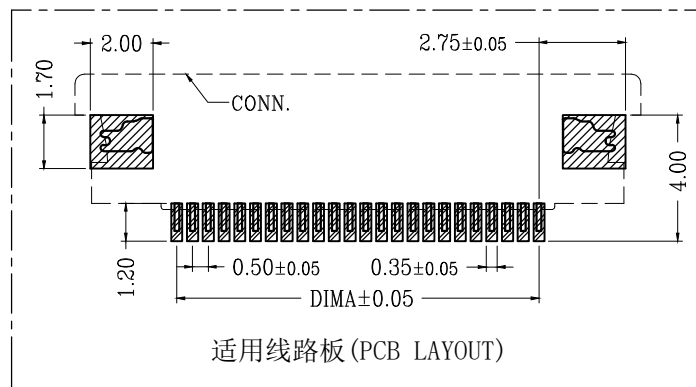

适用线路板 (PCB LAYOUT)

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻: ≤0.03Ω。
5. 绝缘电阻: ≥500MΩ
6. 电镀方式 : 端子全雾锡

| 版次 | 变更摘要           | 日期        |
|----|----------------|-----------|
| 0  | 新产品发行          | 2015/1/28 |
| 1  | 配合改善胶芯缺料, 胶芯加胶 | 2019/9/22 |

| 序号 | 品名              | 材质             |
|----|-----------------|----------------|
| ①  | 0.5拉拔胶芯 (H1.2)  | LCP UL94V-0 本色 |
| ②  | 0.5拉拔上端子 (H1.2) | 表面镀锡           |
| ③  | 0.5拉拔后盖 (H1.2)  | LCP UL94V-0 黑色 |
| ④  | 0.5拉拔焊片 (H1.2)  | 表面镀锡           |

| CKT | DIM A | DIM B | DIM C | CKT | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 4   | 1.50  | 2.56  | 7.96  | 33  | 16.00 | 17.06 | 22.46 |
| 5   | 2.00  | 3.06  | 8.46  | 34  | 16.50 | 17.56 | 22.96 |
| 6   | 2.50  | 3.56  | 8.96  | 35  | 17.00 | 18.06 | 23.46 |
| 7   | 3.00  | 4.06  | 9.46  | 36  | 17.50 | 18.56 | 23.96 |
| 8   | 3.50  | 4.56  | 9.96  | 37  | 18.00 | 19.06 | 24.46 |
| 9   | 4.00  | 5.06  | 10.46 | 38  | 18.50 | 19.56 | 24.96 |
| 10  | 4.50  | 5.56  | 10.96 | 39  | 19.00 | 20.06 | 25.46 |
| 11  | 5.00  | 6.06  | 11.46 | 40  | 19.50 | 20.56 | 25.96 |
| 12  | 5.50  | 6.56  | 11.96 | 41  | 20.00 | 21.06 | 26.46 |
| 13  | 6.00  | 7.06  | 12.46 | 42  | 20.50 | 21.56 | 26.96 |
| 14  | 6.50  | 7.56  | 12.96 | 43  | 21.00 | 22.06 | 27.46 |
| 15  | 7.00  | 8.06  | 13.46 | 44  | 21.50 | 22.56 | 27.96 |
| 16  | 7.50  | 8.56  | 13.96 | 45  | 22.00 | 23.06 | 28.46 |
| 17  | 8.00  | 9.06  | 14.46 | 46  | 22.50 | 23.56 | 28.96 |
| 18  | 8.50  | 9.56  | 14.96 | 47  | 23.00 | 24.06 | 29.46 |
| 19  | 9.00  | 10.06 | 15.46 | 48  | 23.50 | 24.56 | 29.96 |
| 20  | 9.50  | 10.56 | 15.96 | 49  | 24.00 | 25.06 | 30.46 |
| 21  | 10.00 | 11.06 | 16.46 | 50  | 24.50 | 25.56 | 30.96 |
| 22  | 10.50 | 11.56 | 16.96 | 51  | 25.00 | 26.06 | 31.46 |
| 23  | 11.00 | 12.06 | 17.46 | 52  | 25.50 | 26.56 | 31.96 |
| 24  | 11.50 | 12.56 | 17.96 | 53  | 26.00 | 27.06 | 32.46 |
| 25  | 12.00 | 13.06 | 18.46 | 54  | 26.50 | 27.56 | 32.96 |
| 26  | 12.50 | 13.56 | 18.96 | 55  | 27.00 | 28.06 | 33.46 |
| 27  | 13.00 | 14.06 | 19.46 | 56  | 27.50 | 28.56 | 33.96 |
| 28  | 13.50 | 14.56 | 19.96 | 57  | 28.00 | 29.06 | 34.46 |
| 29  | 14.00 | 15.06 | 20.46 | 58  | 28.50 | 29.56 | 34.96 |
| 30  | 14.50 | 15.56 | 20.96 | 59  | 29.00 | 30.06 | 35.46 |
| 31  | 15.00 | 16.06 | 21.46 | 60  | 29.50 | 30.56 | 35.96 |
| 32  | 15.50 | 16.56 | 21.96 |     |       |       |       |

深圳市金航标电子有限公司 [www.kinghelm.com.cn](http://www.kinghelm.com.cn)

KH-CL0.5-H1.2-12PS-SMT 0755-28190160

|             |                         |            |        |
|-------------|-------------------------|------------|--------|
| 品名 (TITLE)  | 0.5 Pitch拉拔卧式上接 (H=1.2) | 制图 (DR)    | Anlan  |
| 料号 (DWG.NO) | KH-CL0.5-H1.2-12PS-SMT  | 校对 (CHKD)  | 李绍宗    |
| 比例 (SCALE)  | 1:1                     | 审核 (APPD)  | 黄志明    |
| 单位 (UNITS)  | mm                      | 张数 (SHEET) | 1 OF 1 |
|             |                         | SIZE       | A4     |
|             |                         | REV        | A      |



一般公差 (TOLERANCE)  
X ±0.50 XX ±1.0  
X ±0.20 XXX ±0.05  
ANGLES ±1°