
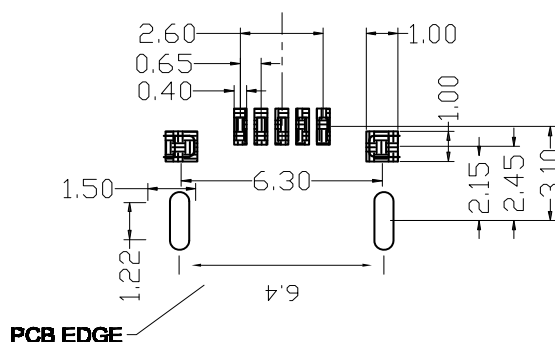
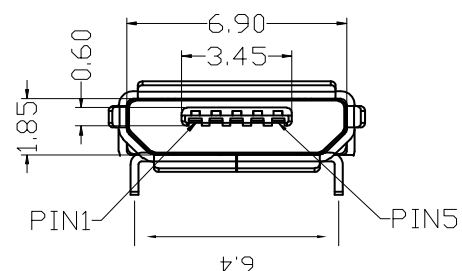
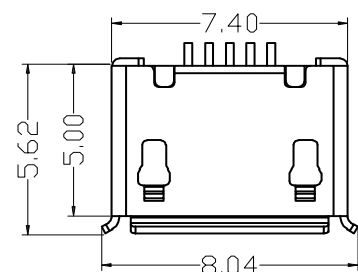




Kinghelm®

REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE

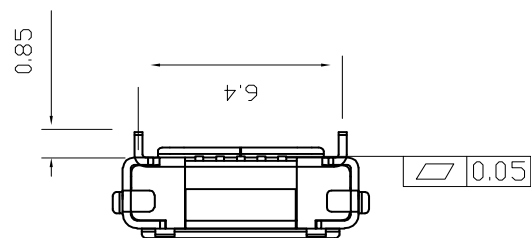

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - CONTACT: COPPERY ALLOY T=0.15MM
 - SHELL: COPPERY ALLOY T=0.25MM
- FINISH:
 - CONTACT:
3U"MIN, PLATED ON CONTACT AREA
G/F PLATING ON SOLDER TAIL AREA
50~80U" NICKEL UNDERPLATING OVERALL
 - SHELL:
80~120U" MATTER TIN PLATING ALL
50~80U" NICKEL UNDERPLATING OVERALL
- SPECIFICATION:
 - CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - VOLTAGE: 30 VAC
 - TEMPERATURE RANGE: -30°C~85°C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250VAC R.M.S
 - INSULATION RESISTANCE: 100 MEGOHMS MIN

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN ZQL	DATE	深圳市金航标电子有限公司		www.kinghelm.com.cn
				KH-MICRO6.4H-5PJ		0755-83044319
X. ± 0.35 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10	X' $\pm 2.0'$.X' $\pm 1.0'$.XX' $\pm 0.5'$	CHECK ZQL	DATE	FILE NAME(??)	MICRO USB 5PIN TYPE DIP SMT	
				PART NO(??)		
UNIT:mm	SCALE 1:1	APPRO.	DATE	DRAWING NO(??)		
A4	SHEET: 1 of 1				REV. A0	