
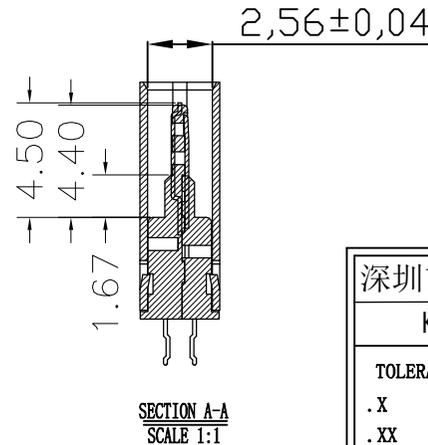

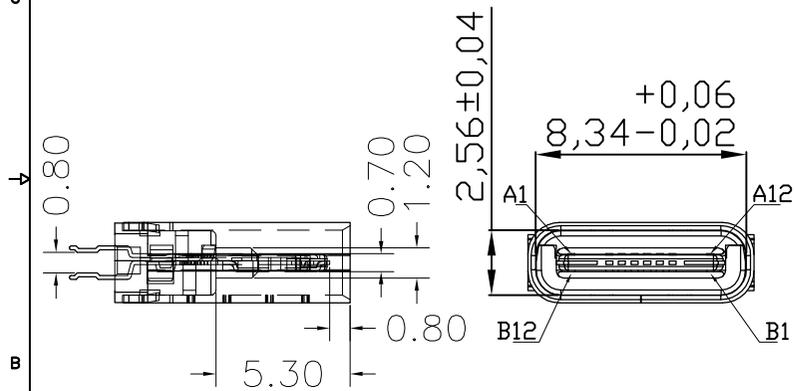


Kinghelm®

REV	LTR	DESCRIPTION	DATE	APPROVED
AO		依新料号编码原则发行图面		

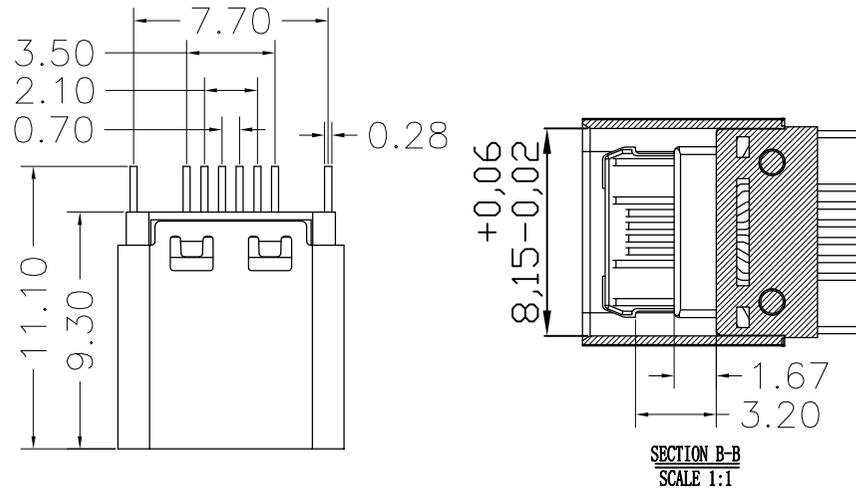

备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: 磷铜, T=0.12mm; 镍底, 镀金1μ”

1.3外壳: 不锈钢, T=0.30mm; 表面镀镍100μ”
或亮锡100μ”

2.主要特性:

2.1额定电流: 3A

2.2接触阻抗: 30mΩ MAX

2.3绝缘阻抗: 100MΩ MIN 250V DC

2.4耐压测试: 250V AC

2.5沾锡性: 温度250? °C, 时间5?.5s

2.6整体插入力: 3.57kgf MAX

整体拔出力: 1.02kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -30°C~+80°C

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

深圳市金航标电子有限公司		www.kinghelm.com.cn		
KH-TYPE-C-JB.W-16P		0755-28190160		
TOLERANCES		TITLE: 0		
. X	±0.30	APPD.:	USB 3.1 Type-C/F 16PIN母座无叉脚夹板0.80成品	
. XX	±0.20	CHECK:	DRAWING NO.:	
. XXX	±0.10	DRAWN:	REV.:	SIZE:
ANGLES	±3.00°		A/O	A4
			UNIT:	SCALE:
			M M	1 : 1
			SHEET:	1 / 1