
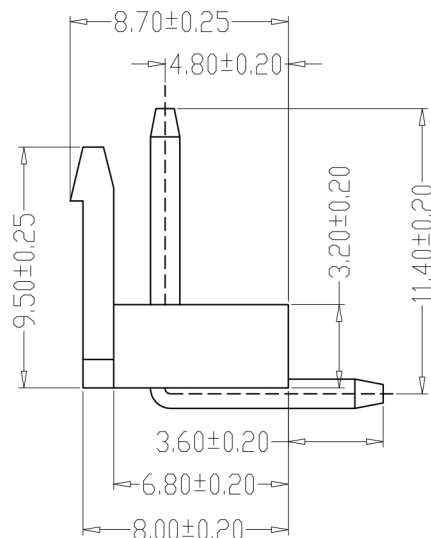




Kinghelm®

型号：KH-VH-9P-W

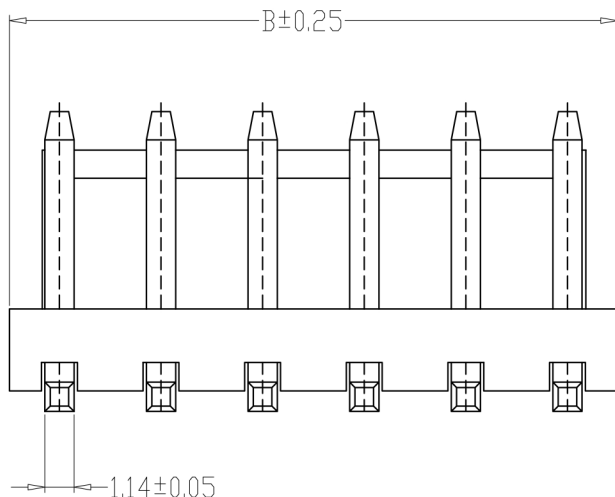

SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

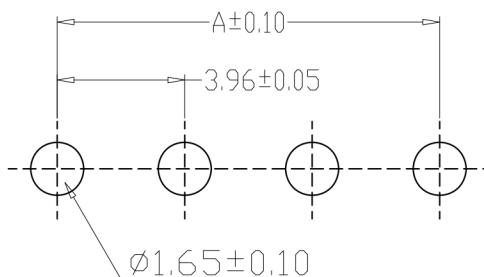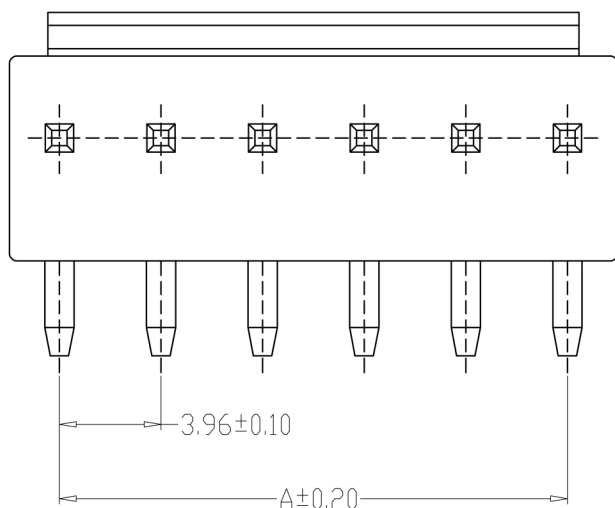

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A3961-02AW	3.96	7.92
A3961-03AW	7.92	11.88
A3961-04AW	11.88	15.84
A3961-05AW	15.84	19.80
A3961-06AW	19.80	23.76
A3961-07AW	23.76	27.72
A3961-08AW	27.72	31.68
A3961-09AW	31.68	35.64
A3961-10AW	35.64	39.60
A3961-11AW	39.60	43.56
A3961-12AW	43.56	47.52

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2013、07、01			料 号 PART NO.	A3961-NAW		版 本 REV.	A					
			X.±0.25	X.'±2°		审 核 张 名				品 名 TITLE	VH平弯			页 次 SHEET	1/1			
			.X±0.20	.X'±1°		CHECK 2013、07、03					WAFAER DIP TYPE							
			.XX±0.15	.XX'±0.5°		核 准 张 名					客户料号 CUTM. NO.					KH-VH-9P-W		
			.XXX±0.10	.XXX'±0.5°		APPROVAL 2013、07、05										深圳市金航标电子有限公司		
					单位 UNITS	MM	比例 SCALE	1:1		www.kinghelm.com.cn	0755-83044319							